



Specifications

CPU	LGA1150 for 4th Generation Intel® Core™ i7/i5/i3 / Xeon® processors
Chipset	Intel® C226 PCH Chipset
Memory	4x DDR3 DIMMs Max. 32GB, up to 1600MHz ECC or non-ECC
LAN	1x Intel® I217LM GbE PHY w/ iAMT 9.0 support 7x Intel® I210-AT GbE LAN 5/6 & 7/8 Bypass
Expansion Slot	1x mSATA socket 1x Mini PCI-E (mSATA compatible) socket 1 or 2 slots opening on rear panel
Storage	1x 2.5" / 3.5" HDD drive bay (depending on SKU) 1x CF socket 1x Dual 2.5" HDD drive bay (optional)
USB	2x USB 3.0 port on front panel Pin header for 6x USB 2.0 ports
Serial I/O	1x RJ45 console, COM2 pin header
VGA	Pin header
LED	Power / Bypass Activity / Status
Power Supply	Full range 300W ATX power supply or 275W 1+1 Redundant power supply
Dimensions	440 mm (W) x 411.5 mm (D) x 44 mm (H) 17.3"(W) x 16.2"(D) x 1.73"(H)
Weight	9.0 kg (19.84 lbs)
Operating Temperature	0°C ~ 45°C (32°F~113°F)
Storage Temperature	-20° ~ 70°C (-4°F~158°F)
Operating Humidity	5~90%
Certification	CE/FCC


Features

- Supports 4th Generation Intel® Core™ i7/i5/i3 / Xeon® processors
- Advanced LAN Bypass
- 8x PCI-E GbE ports
- 4x DDR3 DIMMs; Max. 32 GB
- 3x system smart fans
- 1x CF socket, 1x Mini PCI-E (mSATA compatible)
1x mSATA socket
- Supports iAMT 9.0

Accessories

MB968	LGA1150 for 4th Generation Intel® Core™ i7/i5/i3 / Xeon®, C226 PCH, 1x Intel® GbE I217LM + 7x Intel® GbE I210-AT, LAN 5/6 & 7/8 Bypass, SATA connector, Mini PCI-E, CF & PCI-E expansion
VGA4	VGA cable
IP331	1-to-1 PCI-E 8x riser card
IP332	PCI-E 8x adapter card
IP333	2-to-2 PCI-E 8x riser card
2.5" HDD Kit	Dual 2.5" HDD bracket
PK1-51	Console cable, 160cm
USB2-7	Dual port USB 2.0 cable, 300mm

Dimensions

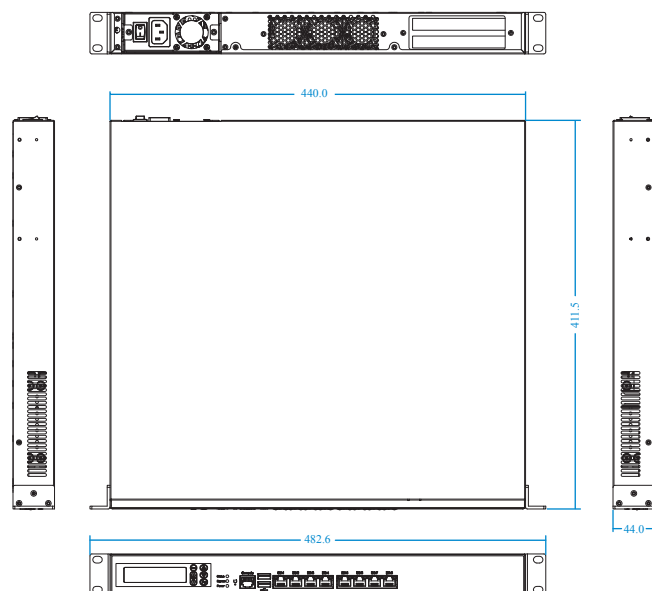

FWA8308

1U Mainstream 4th Generation Intel® Core™ i7/i5/i3 / Xeon®
Network Appliance with 8 GbE Ports

Ordering Information

FWA8308 Series	Compatible CPU	FWA8308 Series System Configurations									Remarks
		Front Expansion Card	IP331 1-1 Riser	IP332 PCI-E Adaptor	IP333 2-2 Riser	3.5" HDD Bracket	Single 2.5" HDD Bracket	Dual 2.5" HDD Bracket	# of Rear Expansion Slots	Power Supply	
FWA8308	E3-1275 v3 E3-1225 v3 E3-1268L v3	Optional	1	1	N/A	N/A	1	Optional	1	300W PSU	1U 19" Rackmount, MB968, supports LGA1150 CPUs, 8x GbE. Eth5/6 & 7/8 Bypass, 300W PSU, LCM, CPU cooler, single 2.5" HDD bracket, IP331 and IP332, Barebone
FWA8308-RPSU	i7-4770TE i7-4770S i5-4570S i5-4570TE i3-4330 i3-4330TE	Optional	1	1	N/A	N/A	1	N/A	1	275W 1+1 Redundant PSU	1U 19" Rackmount, MB968, supports LGA1150 CPUs, 8x GbE. Eth5/6 & 7/8 Bypass, 275W1+1 Redundant PSU, LCM, CPU cooler, single 2.5" HDD bracket, IP331 and IP332, Barebone
FWA8308-2SLOT	G3420 G3320TE G1820TE G1820	N/A	N/A	N/A	1	1	N/A	Optional	2	300W PSU	1U 19" Rackmount, MB968, supports LGA1150 CPUs, 8x GbE. Eth5/6 & 7/8 Bypass, 300W PSU, LCM, CPU cooler, 3.5" HDD bracket, IP333, Barebone

Compatible Expansion Cards

Module Name	Interface	Ethernet Controller	Bypass
IBP161	4-port GbE RJ45	Realtek RT8111E	Hardware Option
IBP162	2-port 10 GbE SFP+	Intel® 82599ES	No
IBP163	2-port GbE RJ45 or SFP (Auto Sense)	Intel® i350-AM2	No
IBP164	Crypto Acceleration Card	Cavium CN6120	No
IBP165	4-port GbE RJ45	Intel® I210-AT	BIOS Control
IBP167	8-port GbE RJ45	Intel® I350-AM4	No